

softstart_routed

Design Report

Rev 1 | 2026-06-11 | jlcpcb-tier1

kicad-tools 0.13.0

Board Summary

Property	Value
Layers	4 copper (F.Cu, In1.Cu, In2.Cu, B.Cu)
Footprints	78 (0 SMD, 0 THT, 78 other)
Nets	41
Traces	4519 segments
Vias	158
Board Size	150.0 x 100.0 mm

Design Overview

Theory of Operation

Generator Soft-Start - Supercapacitor Power Assist

120VAC soft-start for 8000 BTU AC on Honda EU1000i

STM32G031K8T6 MCU, 2x30S supercap banks, back-to-back FETs + UCC27211 drivers

Power Architecture

Power Rails: +3V3, GND, PWR_FLAG

Regulator	Device
U4	XC6206-3.3V
U9	LM7812

Assembly Notes

1 fine-pitch component; 6 polarized components

- **Fine-pitch components:** 1 (U1)
- **Polarized components:** 6 -- check orientation markings


ERC Status


Metric	Count
Errors	0
Warnings	0

Status: SKIPPED -- ERC skipped by user request


File: softstart.kicad_sch
Title: Generator Soft-Start – Supercapacitor Power Assist
 Size: A4 Date: 2026-06 Rev: B
 KiCad E.D.A. 10.0.1 Id: 1/1

PCB Layout

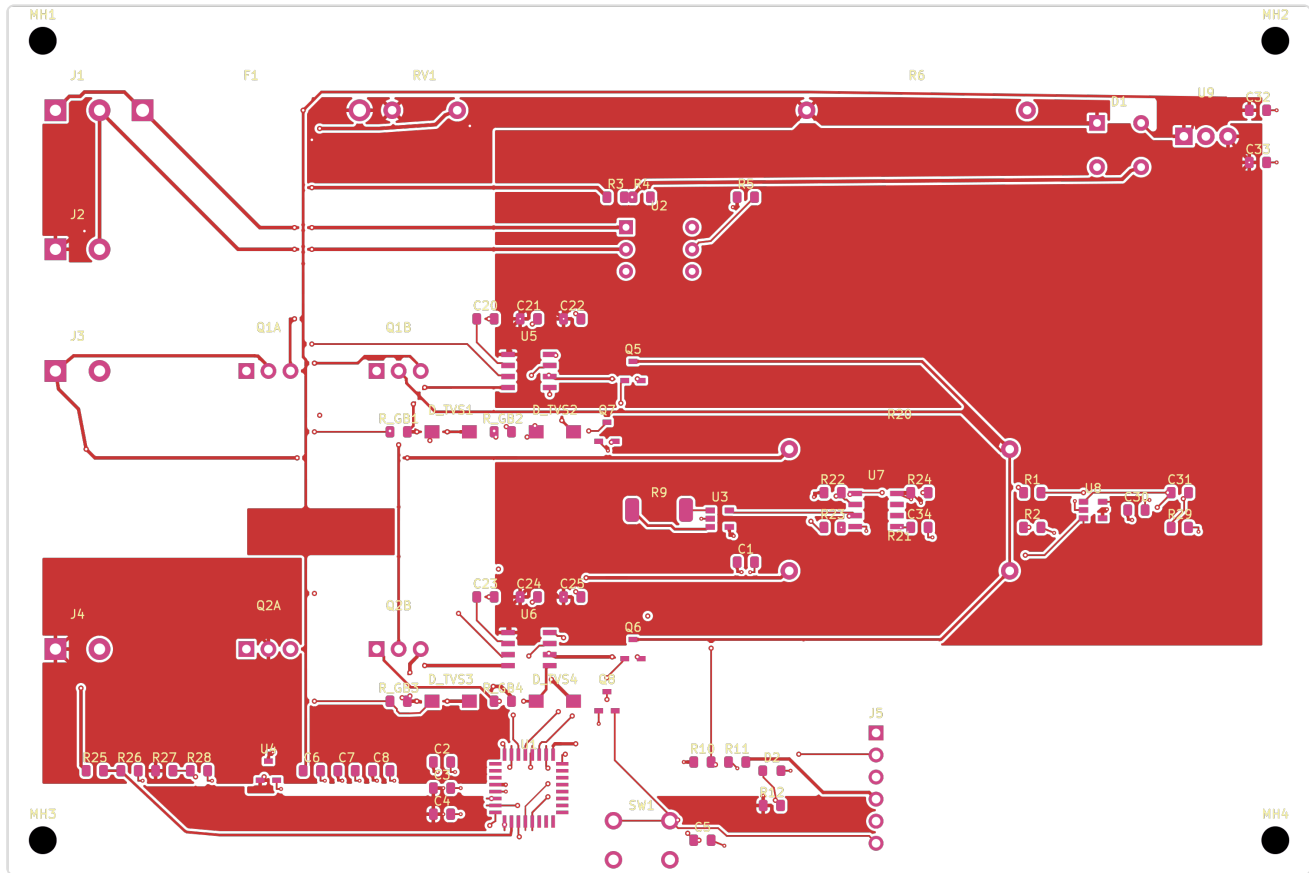


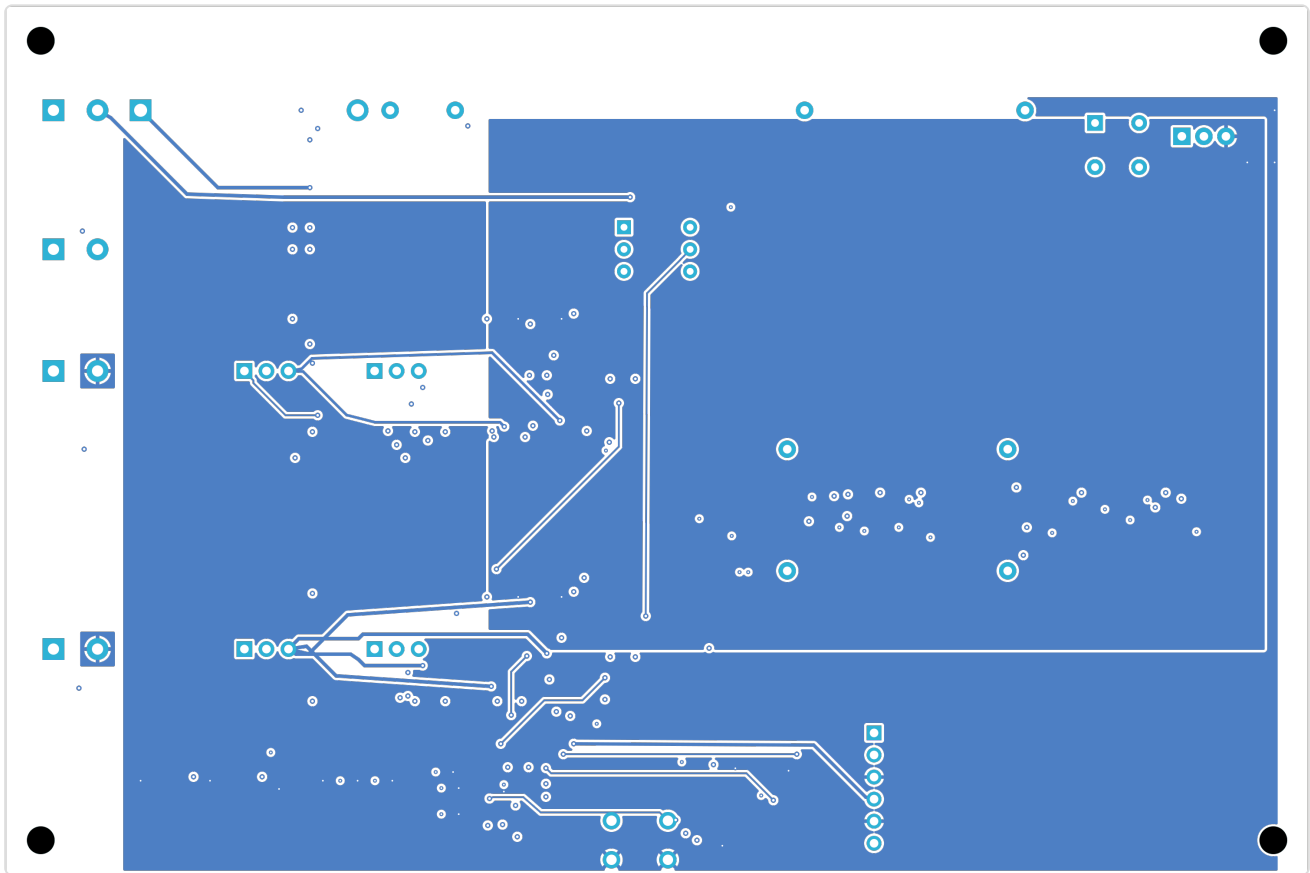

Copper

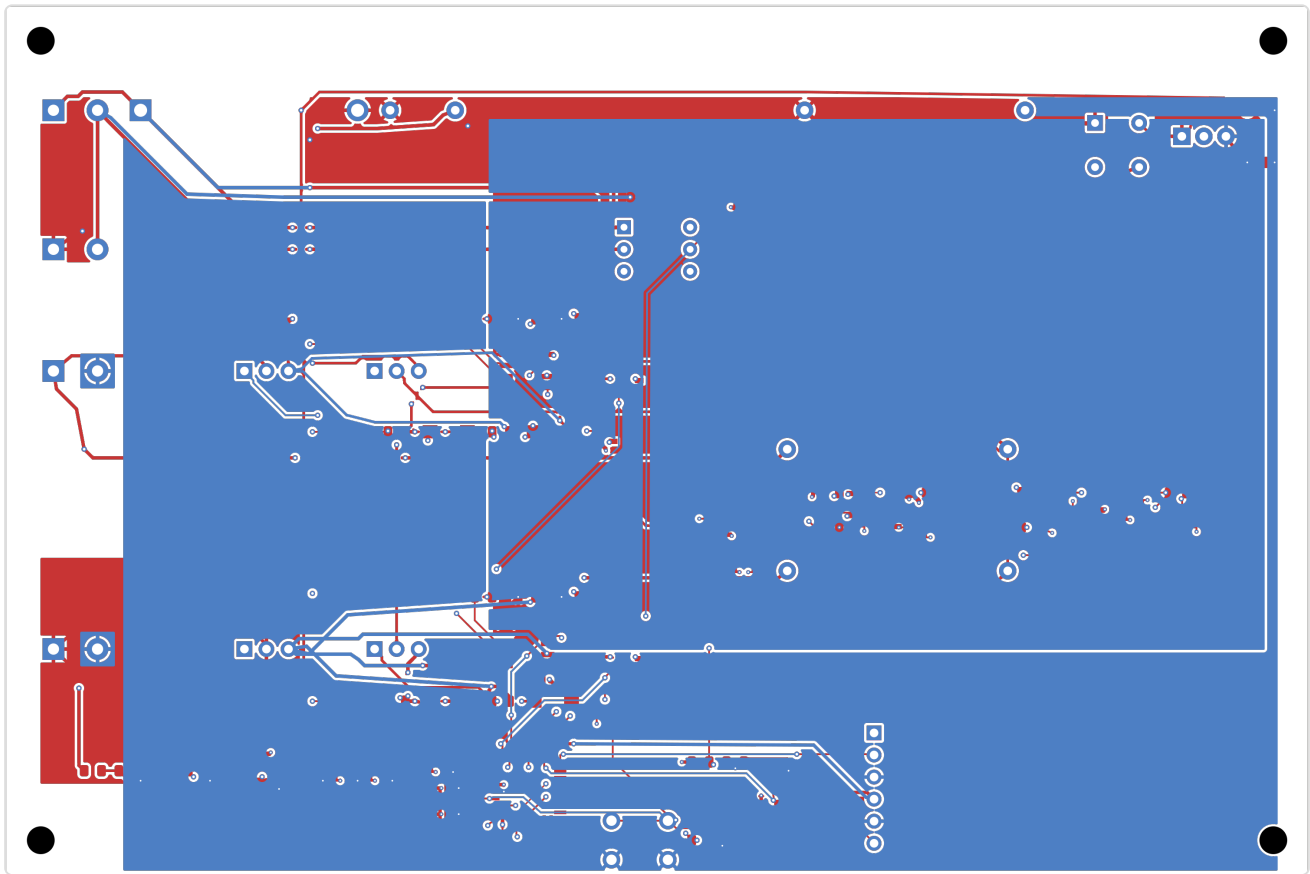


Assembly

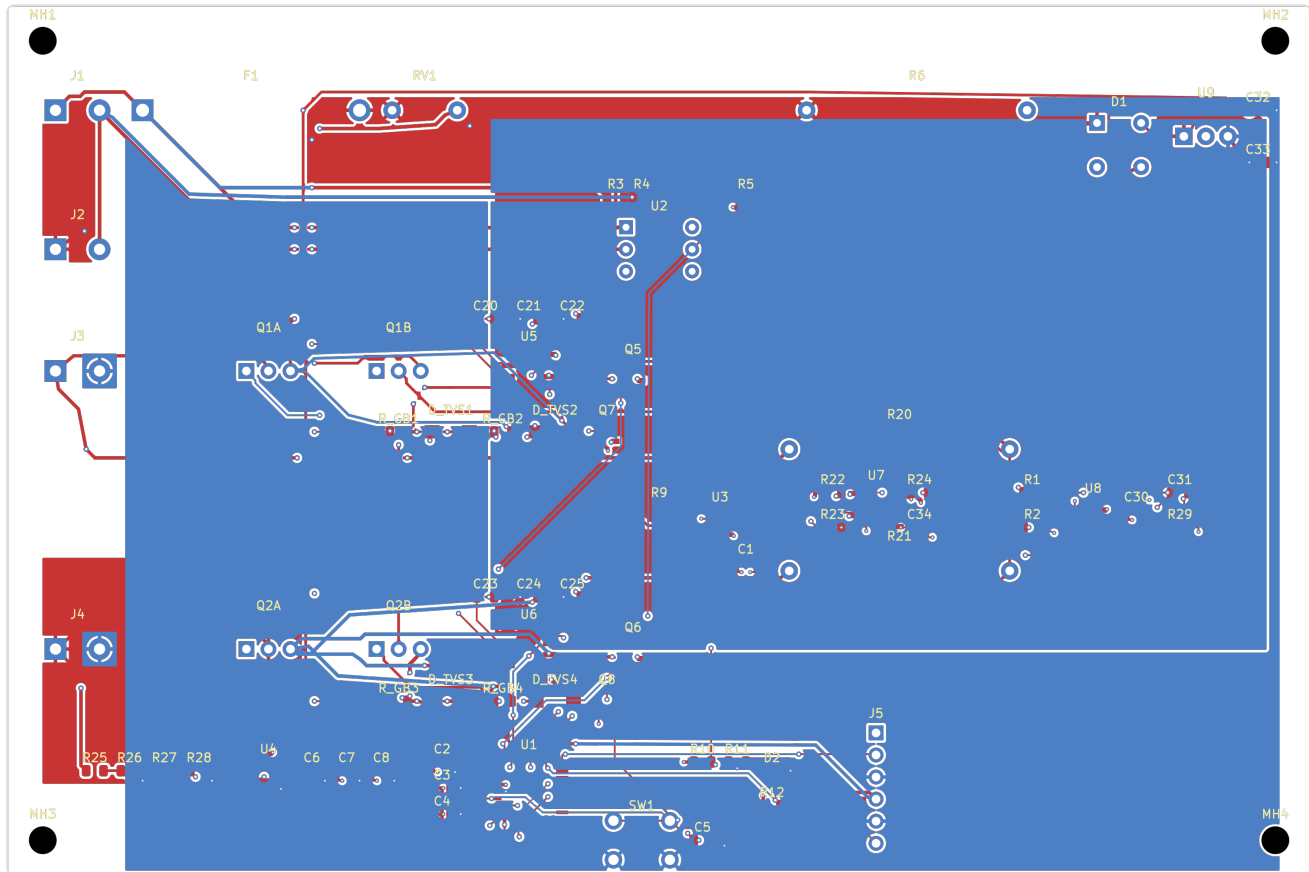


Copper Layers


F.Cu

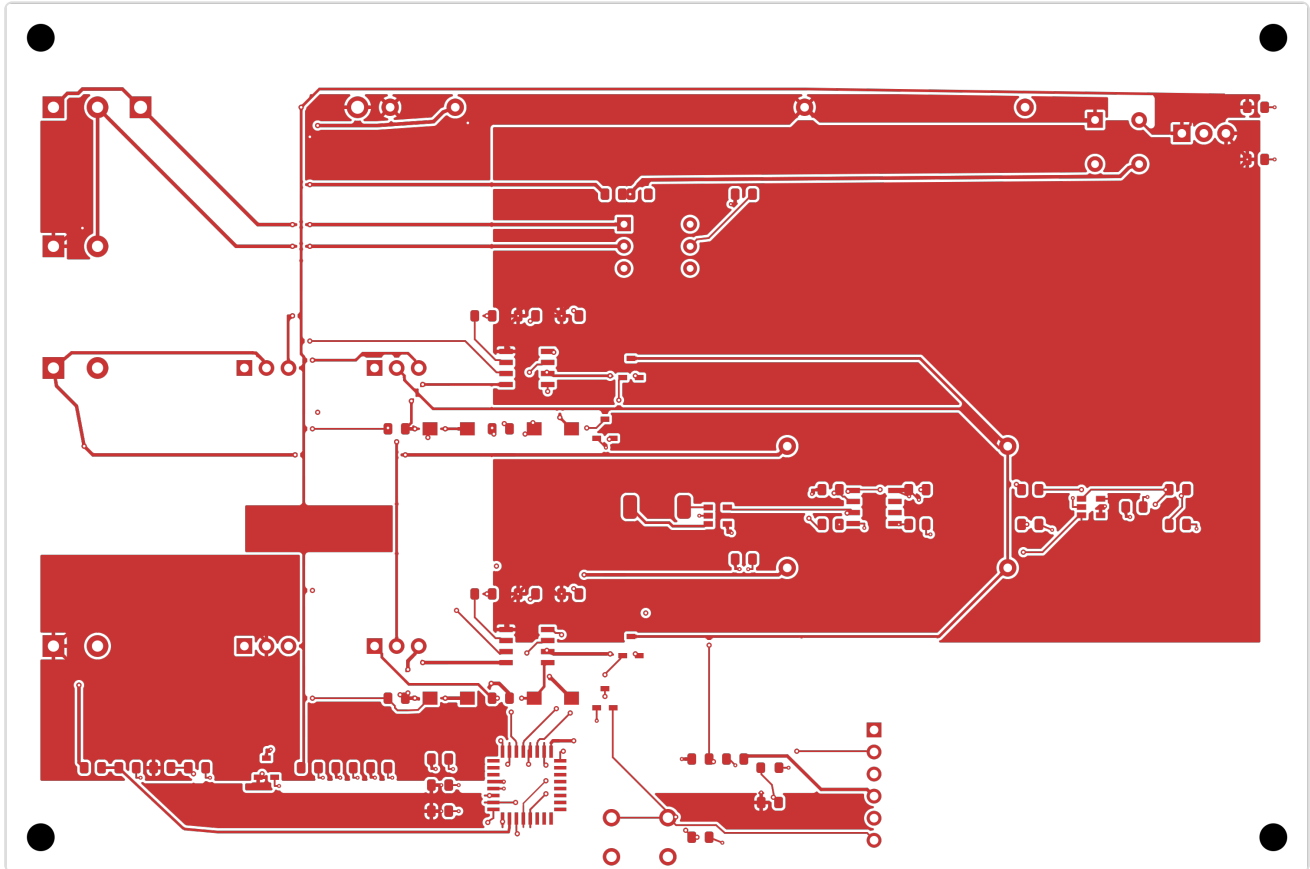


In1.Cu

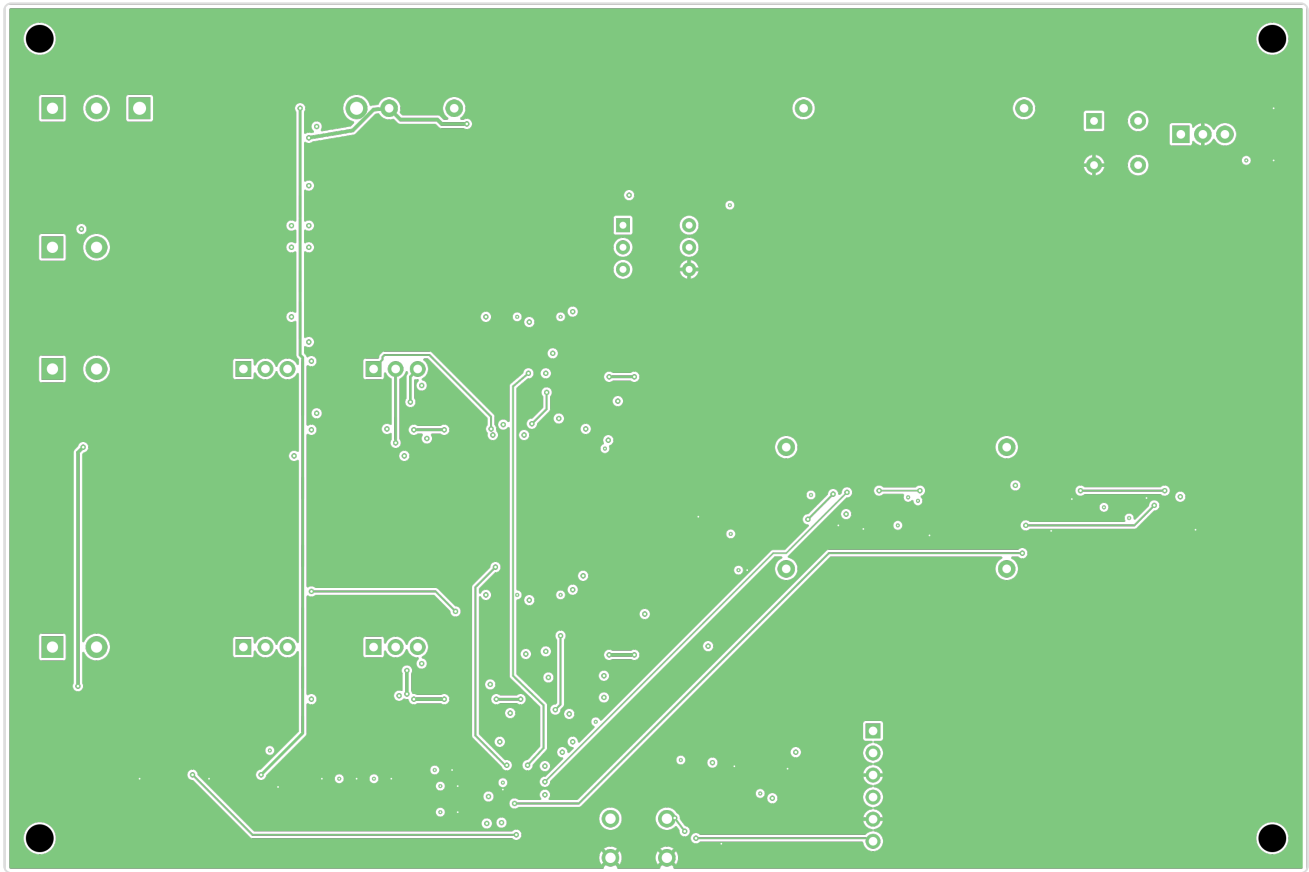

In2.Cu

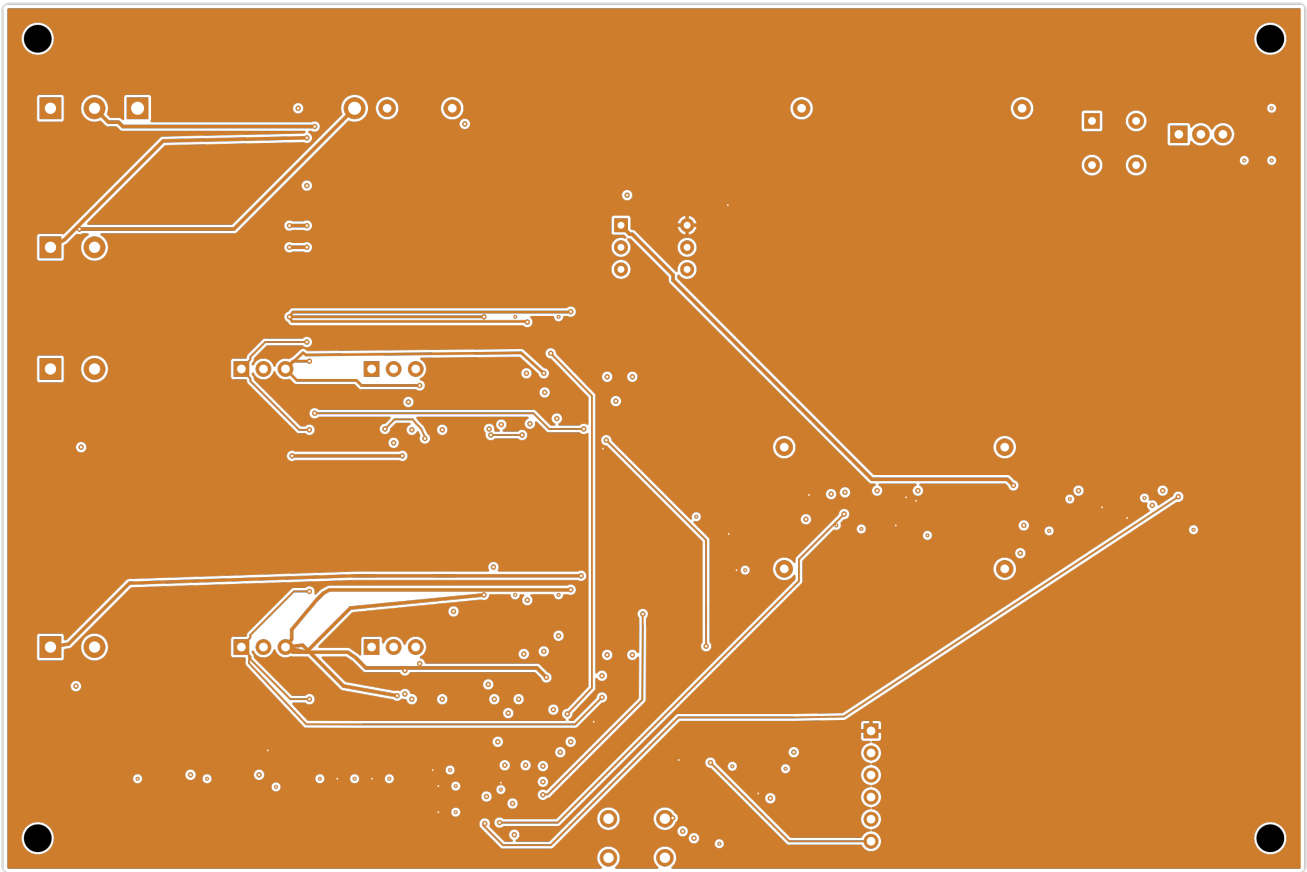

B.Cu

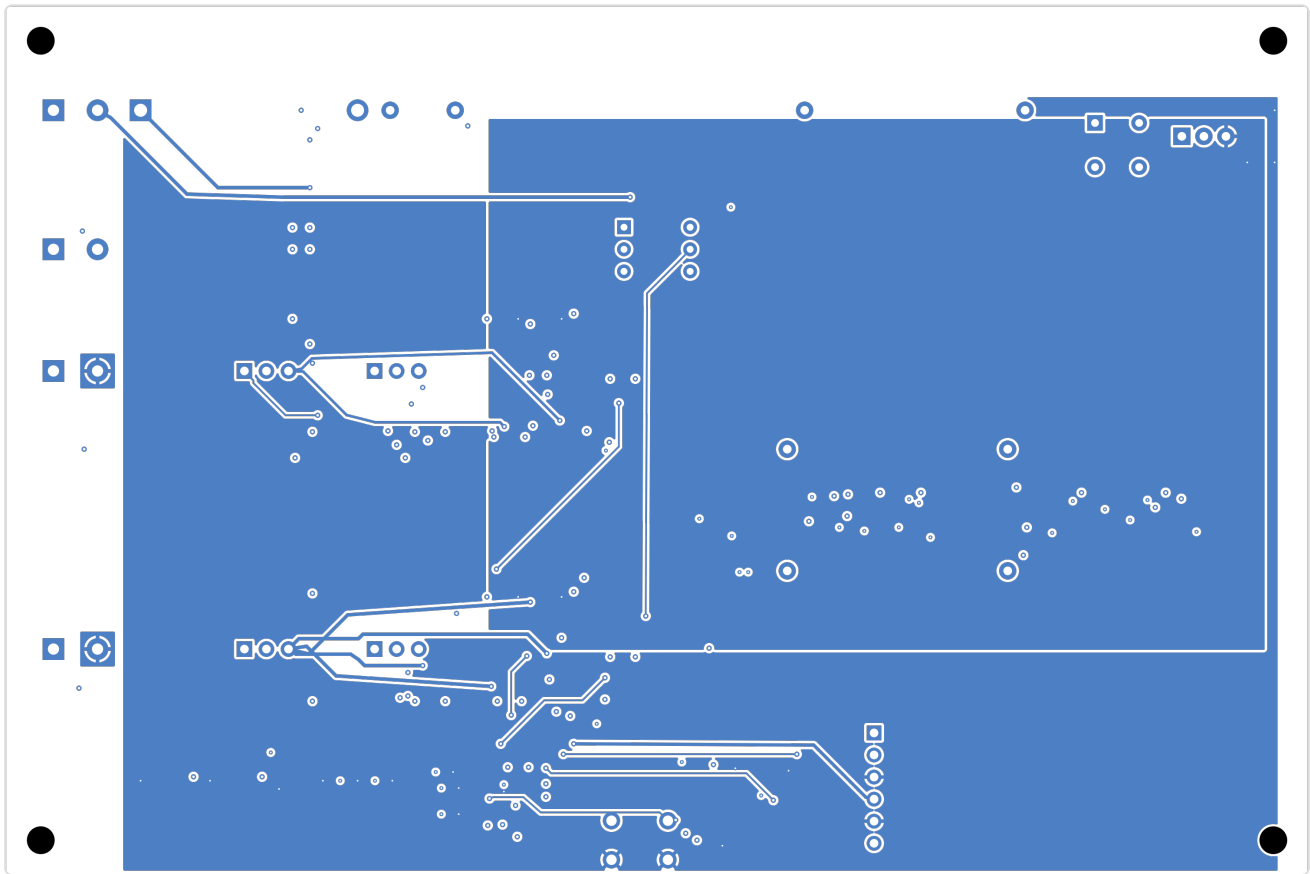

Bill of Materials

Value	Package	Qty	References
100nF		5	C5, C20, C22, C23, C25
100nF	C_0402_1005Metric	8	C1, C2, C3, C8, C30, C31, C33, C34
10uF		2	C21, C24
10uF	C_0805_2012Metric	3	C6, C7, C32
4.7uF	C_0805_2012Metric	1	C4
RB157	Diode_Bridge_DIP-4_W 7.62mm_P5.08mm	1	D1
SMBJ18A	D_SMB	4	D_TVS1, D_TVS2, D_TVS3, D_TVS4
STATUS		1	D2
15A		1	F1
AC_INPUT	TerminalBlock_bornier-2 _P5.08mm	1	J1
AC_OUTPUT	TerminalBlock_bornier-2 _P5.08mm	1	J2
SCAP_NEG	TerminalBlock_bornier-2 _P5.08mm	1	J4
SCAP_POS	TerminalBlock_bornier-2 _P5.08mm	1	J3
SWD-6		1	J5
2N7002	SOT-23	2	Q7, Q8
AO3400	SOT-23	2	Q5, Q6
IRFB4110	TO-220-3_Vertical	4	Q1A, Q1B, Q2A, Q2B
100R	R_Axial_DIN0617_L17.0 mm_D6.0mm_P25.40m m_Horizontal	2	R20, R21
10k		7	R2, R10, R11, R23, R24, R26, R28
10k	R_0805_2012Metric	6	R_GB1, R_GB2, R_GB3, R_GB4, R5, R29
150R 5W		1	R6

Value	Package	Qty	References
	R_Axial_DIN0617_L17.0 mm_D6.0mm_P25.40m m_Horizontal		
1k		2	R12, R22
275VAC	RV_Disc_D12mm_W4.2 mm_P7.5mm	1	RV1
290.0k		2	R25, R27
33k	R_0805_2012Metric	2	R3, R4
5mR	R_2512_6332Metric	1	R9
990.0k		1	R1
RESET		1	SW1
H11AA1	DIP-6_W7.62mm	1	U2
INA180A3	SOT-23-5	1	U3
LM393	SOIC-8_3.9x4.9mm_P1. 27mm	3	U7, U7, U7
LM7812	TO-220-3_Vertical	1	U9
MCP6001	SOT-23-5	1	U8
STM32G031K8T6	LQFP-32_7x7mm_P0.8 mm	1	U1
UCC27211	SOIC-8_3.9x4.9mm_P1. 27mm	2	U5, U6
XC6206-3.3V		1	U4

DRC Status

Metric	Count
Errors	0
Warnings	0
Blocking	0

Status: PASS

Manufacturing Readiness

Verdict: READY

Action Items

- **[OPTIONAL]** Verify zone fill in KiCad for 12 zone-connected nets
- **[OPTIONAL]** Analog-sensitive: U3 (INA180A3) — instrumentation amplifier (TI INA); manual layout review recommended
- **[OPTIONAL]** Analog net: AC_LINE — audio signal; keep short, away from digital/switching nets
- **[OPTIONAL]** Analog net: BUS_LINE — audio signal; keep short, away from digital/switching nets
- **[OPTIONAL]** Analog net: FUSED_LINE — audio signal; keep short, away from digital/switching nets
- **[OPTIONAL]** Analog net: ISENSE_NEG — analog signal; noise-sensitive, avoid crossing digital signals
- **[OPTIONAL]** Analog net: ISENSE_POS — analog signal; noise-sensitive, avoid crossing digital signals
- **[OPTIONAL]** Analog net: I_SENSE_OUT — analog signal; noise-sensitive, avoid crossing digital signals
- **[OPTIONAL]** Analog net: V_AC_SENSE — analog signal; noise-sensitive, avoid crossing digital signals
- **[OPTIONAL]** Analog net: V_AC_SENSE_RAW — analog signal; noise-sensitive, avoid crossing digital signals
- **[OPTIONAL]** Analog net: V_BANK_NEG_SENSE — analog signal; noise-sensitive, avoid crossing digital signals
- **[OPTIONAL]** Analog net: V_BANK_POS_SENSE — analog signal; noise-sensitive, avoid crossing digital signals

Analog Components

1 analog-sensitive component detected -- manual layout review recommended.

Reference	Value	Reason
U3	INA180A3	instrumentation amplifier (TI INA)

Routing Status

Metric	Value
Signal Net Completion	100.0% (27/27)
Overall Completion	100.0%
Complete Nets	41 / 41
Zone-Connected Nets	14
Single-Pad Nets	2 (no routing needed)
Incomplete Nets	0
Unconnected Pads	0

Zone-Connected Nets

- +3.3V
- AC_LINE
- AC_NEUTRAL
- BUS_LINE
- FUSED_LINE
- GND
- SCAP_NEG+
- SCAP_NEG_GND
- SCAP_POS+
- SCAP_POS_GND
- SRC_NEG
- SRC_POS
- VGATE
- VRECT

Single-Pad Nets

2 single-pad nets (no routing needed) -- not listed individually.

Cost Estimate

Metric	Per Board (estimated)
PCB Fabrication	~5.0 USD
Components (estimated)	~5.72 USD
Assembly (estimated)	~2.52 USD
Total (estimated)	~13.24 USD
Batch Quantity	5
Batch Total (estimated)	~66.21 USD